



M S Swastik Threaded Flanges

As the name itself suggests, these are flanges with self threading. Commonly used for clamping of two MS Pipes in Agriculture, Process and Fire fighting Systems.

Available in 2" to 4" in regular as well as reducing sizes.

Flanges are zinc plated with yellow passivation.

MS Swastik Threaded Flanges is categorised as the Key Product in the market.

| Size | Thk | Std Packing |
|-----------|-----|-------------|
| 2" | 6mm | 50 Nos |
| 2.5" | 6mm | 50 Nos |
| 2.5" X 2" | 6mm | 50 Nos |
| 3" | 7mm | 30 Nos |
| 3" X 2.5" | 7mm | 30 Nos |
| 3" X 2" | 7mm | 30 Nos |
| 4" | 7mm | 25 Nos |
| 4" X 3" | 7mm | 25 Nos |
| 4" X 2.5" | 7mm | 25 Nos |
| 4" X 2" | 7mm | 25 Nos |



M S Flanges / M S Tail Ring / M S Close Plate

MS Flanges - Available as per different standards like Table D, E, F, ASA 150, ISI Flanges in different thickness and sizes. We manufacture customized flanges.



M S Tail Ring - Available in different thickness from 3mm to 12mm. Also available in Short Bore as well as Big Bore rings.



M S Close Plate - Available in different thickness from 3mm to 12mm. MS Close Plates are used to stop flow of fluid from pipe end. It is also known as Dummy Plates.



M S Bore Clamps

M S Bore Clamp is used in Borewells to hold pipes & electric pump motor in borewell.

Two M S Strips with U bend are used for clamping of pipe.

Available in light as well as in heavy structures.

Light -

| Size | Width | Thk | Length | Std Packing |
|--------------------|-------|-----|--------|-------------|
| 1" 1.25" 1.5 | 40mm | 5mm | 11" | 50 Nos |
| 2" | 50mm | 8mm | 13" | 50 Nos |

Heavy -

| Size | Width | Thk | Length | Std Packing |
|--------------------|-------|------|--------|-------------|
| 1" 1.25" 1.5 | 40mm | 8mm | 11" | 30 Nos |
| 2" | 50mm | 10mm | 13" | 20 Nos |
| 2.5" | 50mm | 10mm | 13" | 20 Nos |
| 3" | 50mm | 10mm | 13" | 20 Nos |
| 4" | 50mm | 10mm | 16" | 10 Nos |

Extra Heavy -

| Size | Width | Thk | Length | Std packing |
|------|-------|------|--------------------------|-------------|
| 2" | 50mm | 12mm | 13" 16" 18" 24" | 20 Nos |
| 2.5" | 50mm | 12mm | 18" 24" | 15 Nos |
| 3" | 50mm | 12mm | 18" 24" | 15 Nos |
| 4" | 50mm | 12mm | 18" 24" | 10 Nos |



Fix Nut Hose Clips

This type of clip is used for clamping of HDPE Pipes.

Some Key features of clip

1. Press Nut with self tapping is used in clips.
2. One spanner is required for tightening.
3. Specification - Bolt 3/8" X 2" Nut-3/8" Strips-1mm Thk * 25mm (Width)
4. Clips are Zinc plated with blue passivation
5. Sizes Available - 1", 1.25", 1.5", 2", 2.5", 3", 3.5", 4".

| Sr. No | Size | Size Range | | Std Packing |
|--------|-------|------------|---------|-------------|
| | | Min dia | Max dia | |
| 1 | 1" | 29mm | 33.8mm | 300 Nos |
| 2 | 1.25" | 36mm | 43.5mm | 300 Nos |
| 3 | 1.5" | 43mm | 50mm | 300 Nos |
| 4 | 2" | 64mm | 70mm | 240 Nos |
| 5 | 2.5" | 75mm | 80mm | 240 Nos |
| 6 | 3" | 88mm | 96mm | 240 Nos |
| 7 | 4" | 120mm | 130mm | 144 Nos |



Chasing Quality

M/S - Swastik Press Components

Office - Flat No 04, Mauli Apartment, Plot No 75, Sector-18, Jijamata Park, Chinchwad, Pune - 411019, Maharashtra, India.

Works - Block No-07, Sane Industrial Estate, Chikhali-Akurdi Road, Morewasti, Chikhali, Tal-Haweli, Dist - Pune - 411062, Maharashtra, India

Mobile - +91 9822347456 | +91 7722074756

Email - sales@swastikflanges.com
ambrishbora@rediffmail.com

Web - www.swastikpresscomponents.com

MANUFACTURER OF
HOSE CLIPS
BORE CLAMPS
M S FLANGES
PRESS COMPONENTS

All above products are zinc plated.

Swastik Press Components was established in 2001. We have developed many types of Pipe Fittings in different sizes to meet customer's requirements. We are engaged in manufacturing of Hose Clips, MS Flanges, MS Threaded Flanges, MS Bore Clamps and MS Bore Caps. Factory is situated in the industrial area of Pimpri-Chinchwad, Pune. From last 16 years we are serving in the sector of Pipe Fittings. We believe in the concept "Chase Quality, Quantity Will Chase You." Core customers of company are Dealers from Agricultural Pipe Fitting, Automobile Industries, Process Industries, Boiler Manufacturers, Sugar Industries etc.

We are committed to supply quality products with reliable service to meet customer's requirements.

CORE VALUES

- Openness
- Mindfulness
- Co operation
- Trustworthiness
- Innovation

VISION

"To chase quality & produce innovative products with the help of all the co-partners like employees,dealers & end user customers etc."

MISSION

To be the biggest clamping solutions provider in agricultural pipe fittings in India by chasing quality & customers requirements till December 2020.

GOAL

To introduce five valuable products in our product range every year.



GTW Hose Clip

This type of clip is used for clamping of green hose Pipes.

Some key features of clip

1. Assembled using two MS rods, one of which has self tapping to provide positive locking. Single spanner required for clip tightening.
2. One additional MS Hex Nut is provided to ensure double locking for sustaining high pressure
3. Specification - Bolt 3/8 * 2.75" Nut-3/8" Strips-1mm Thk * 28mm (Width)
4. Clips are zinc plated with silver passivation.
5. Sizes Available - 2", 2.5",3",3.5",4",5",6",8",10"

| Sr. No | Size | Size Range | | Std Packing |
|--------|------|------------|---------|-------------|
| | | Min dia | Max dia | |
| 1 | 2" | 57mm | 64mm | 144 Nos |
| 2 | 2.5" | 69mm | 75.5mm | 144 Nos |
| 3 | 3" | 79mm | 87.5mm | 144 Nos |
| 4 | 3.5" | 88mm | 95mm | 72 Nos |
| 5 | 4" | 112mm | 120.5mm | 72 Nos |



GTG(*) Hose Clip / GTP Hose Clip / GPP Hose Clip

These Gattu type of hose clips are used for clamping of green hose Pipes.

Some key features of clip

1. **GTG(*) Hose Clip** is similar to GTW Hose Clip, painted in green colour.
2. **GTP Hose Clip** is assembled using one MS rod with self tapping and one plastic insert. Single spanner required for clip tightening.
3. **GPP Hose Clip** is assembled using two plastic inserts. Two spanners required for clip tightening.
4. Specification - Bolt 3/8 * 2.75" Nut-3/8" Strips-1mm Thk * 28mm (Width)
5. Sizes Available - 2", 2.5",3",3.5",4",5",6",8",10"

| Sr. No | Size | Size Range | | Std Packing |
|--------|------|------------|---------|-------------|
| | | Min dia | Max dia | |
| 1 | 2" | 57mm | 64mm | 144 Nos |
| 2 | 2.5" | 69mm | 75.5mm | 144 Nos |
| 3 | 3" | 79mm | 87.5mm | 144 Nos |
| 4 | 3.5" | 88mm | 95mm | 72 Nos |
| 5 | 4" | 112mm | 120.5mm | 72 Nos |



BTY Hose Clip

This type of clip is used for clamping of green hose Pipes as well as HDPE Pipes.

Some key features of clip

1. Assembled using two inserts in clips.
2. One M S Hex Nut is provided to ensure tightening of Clip.
3. Two spanners are required for tightening.
4. Specification - Bolt 1/2" X 2.5" Nut-1/2" Strips-1mm Thk * 28mm (Width)
5. Clips are Zinc plated with yellow passivation
6. Sizes Available - 2", 2.5",3",3.5",4",5",6",8",10"

| Sr. No | Size | Size Range | | Std Packing |
|--------|------|------------|---------|-------------|
| | | Min dia | Max dia | |
| 1 | 2" | 57mm | 64mm | 240 Nos |
| 2 | 2.5" | 69mm | 75.5mm | 240 Nos |
| 3 | 3" | 79mm | 87.5mm | 180 Nos |
| 4 | 3.5" | 88mm | 95mm | 180 Nos |
| 5 | 4" | 112mm | 120.5mm | 144 Nos |




Swatik Heavy Hose Clips

This type of clip is used for clamping of Green Hose Pipe as well as HDPE Pipes.

Some key features of clip

1. CR Strips of 2mm thickness is used to provide sturdiness to this clip
2. One spanner is required for tightening.
3. Specification - Bolt 1/2" X 2" Nut-1/2" Strips-2mm Thk * 25mm (Width)
4. Clips are Zinc plated with yellow passivation
5. Sizes Available - 2", 2.5",3",3.5",4"

| Sr. No | Size | Size Range | | Std Packing |
|--------|------|------------|---------|-------------|
| | | Min dia | Max dia | |
| 1 | 2" | 57mm | 64mm | 240 Nos |
| 2 | 2.5" | 69mm | 75.5mm | 240 Nos |
| 3 | 3" | 79mm | 87.5mm | 180 Nos |
| 4 | 3.5" | 88mm | 95mm | 180 Nos |
| 5 | 4" | 112mm | 120.5mm | 144 Nos |

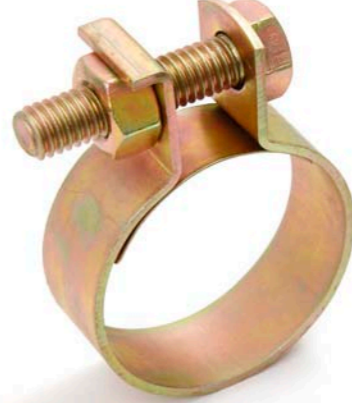

HDPE Hose Clips

This type of clip is used for clamping of HDPE Pipes.

Some key features of clip

1. Assembled using one M S insert with self tapping.
2. One M S Hex Nut is also provided to ensure tightening of Clip.
3. One spanner is required for tightening.
4. Specification - Bolt 3/8" X 2" Nut-3/8" Strips-1mm Thk * 25mm (Width)
5. Clips are Zinc plated with blue passivation
6. Sizes Available - 1",1.25",1.5", 2", 2.5",3",3.5",4".

| Sr. No | Size | Size Range | | Std Packing |
|--------|-------|------------|---------|-------------|
| | | Min dia | Max dia | |
| 1 | 1" | 29mm | 33.8mm | 300 Nos |
| 2 | 1.25" | 36mm | 43.5mm | 300 Nos |
| 3 | 1.5" | 43mm | 50mm | 300 Nos |
| 4 | 2" | 64mm | 70mm | 240 Nos |
| 5 | 2.5" | 75mm | 80mm | 240 Nos |
| 6 | 3" | 88mm | 96mm | 240 Nos |
| 7 | 4" | 120mm | 130mm | 144 Nos |

